


### INSTALLATION OF THE FM UNIT

Before performing any work on the set, make sure that the power cord is detached from the receiver.

1. Remove the top cover.
2. Install the FM unit to the position shown in the photo with two screws supplied.
3. Plug the P11 (2 pins) from the front panel to J1 of this unit, P2 (6 pins) of this unit to J7 on the MAIN unit and P1 (2 pins coaxial cable) of this unit to J8 on the MAIN unit.
4. This completes the installation.
5. Replace the top cover.

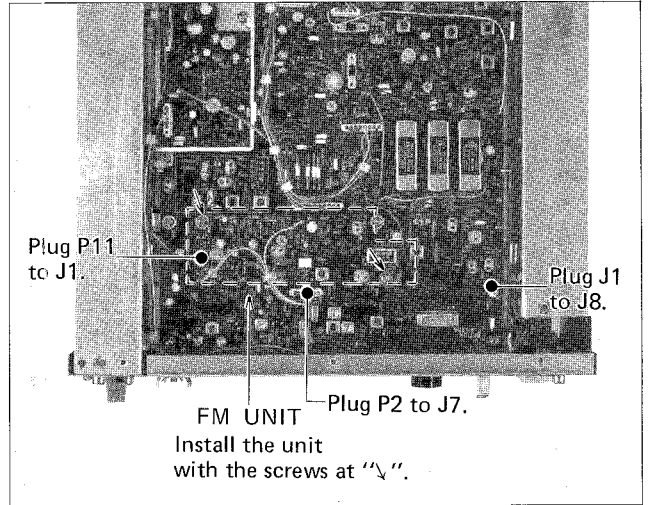

### SCHEMATIC DIAGRAM

